



## **Zoning Resolution**

**THE CITY OF NEW YORK**  
**Zohran K. Mamdani, Mayor**

**CITY PLANNING COMMISSION**  
**Daniel R. Garodnick, Chair**

# **24-551 - Required side setbacks for tall buildings in low bulk districts**

File generated by <https://zr.planning.nyc.gov> on 2/15/2026

---

## 24-551 - Required side setbacks for tall buildings in low bulk districts

---

LAST AMENDED


2/2/2011

R1 R2 R3 R4 R5

In the districts indicated, except R5D Districts, no #community facility# portion of any #building# that is more than 35 feet or more than three #stories# above the level of a #side yard#, whichever is lower, shall be nearer to a #side lot line# bounding such #yard# than a distance equal to one-half the height above yard level of such portion of the #building#.

The following are permitted to project into any open area required under the provisions of this Section:

- (a) parapet walls, not more than four feet high; and
- (b) chimneys or flues, with a total width not exceeding 10 percent of the width of the #building's# walls facing such open area.

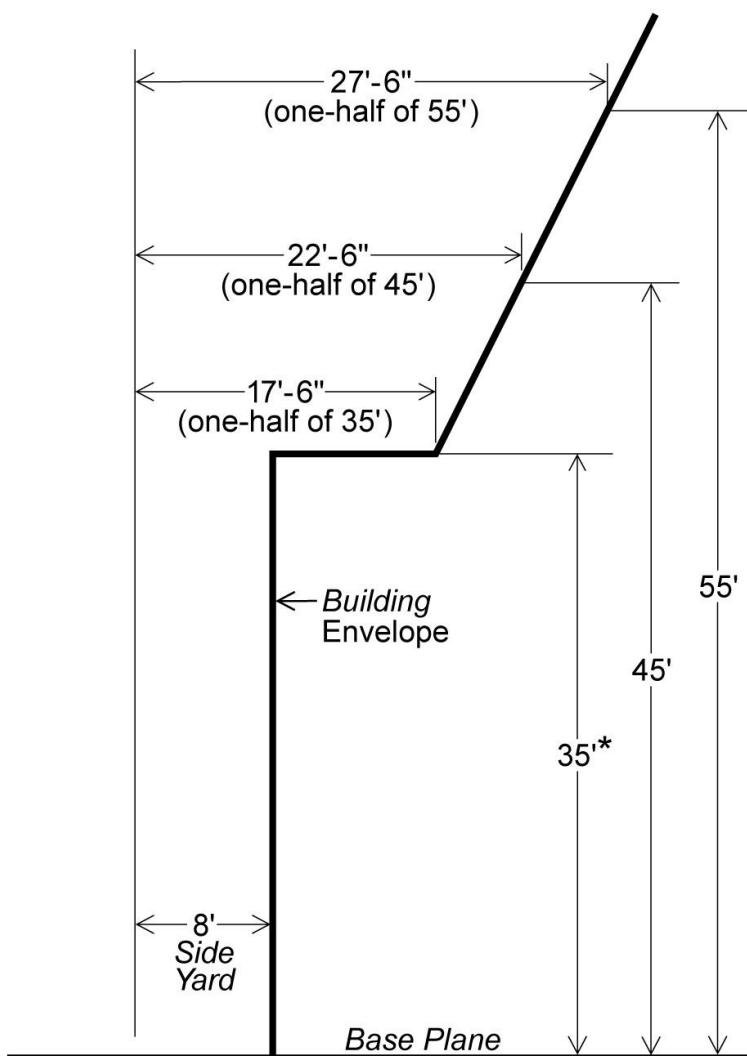

*Zoning  
Lot Line  
and Side  
Lot Line*

\*or 3 stories; whichever is less

## SIDE SETBACK REQUIREMENT