

## **Zoning Resolution**

THE CITY OF NEW YORK

CITY PLANNING COMMISSION

Eric Adams, Mayor

Daniel R. Garodnick, Chair

# 24-55 - Required Side and Rear Setbacks

File generated by https://zr.planning.nyc.gov on 12/8/2025

### 24-55 - Required Side and Rear Setbacks

LAST AMENDED 12/5/2024

#### R1 R2 R3 R4 R5 R6 R7 R8 R9 R10 R11 R12

In all districts, as indicated, side and rear setbacks shall be provided as specified in this Section. Unenclosed balconies, subject to the provisions of Section 24-164 (Balconies); and awnings and other sun control devices, decks, #qualifying exterior wall thickness#, parapet walls, roof thickness, solar energy systems up to four feet high, vegetated roofs, and weirs, as set forth in Section 24-51 (Permitted Obstructions), are permitted to project into or over any open areas required by the provisions of this Section.

## 24-551 - Required side setbacks for tall buildings in low bulk districts


LAST AMENDED 2/2/2011

#### R1 R2 R3 R4 R5

In the districts indicated, except R5D Districts, no #community facility# portion of any #building# that is more than 35 feet or more than three #stories# above the level of a #side yard#, whichever is lower, shall be nearer to a #side lot line# bounding such #yard# than a distance equal to one-half the height above yard level of such portion of the #building#.

The following are permitted to project into any open area required under the provisions of this Section:

- (a) parapet walls, not more than four feet high; and
- (b) chimneys or flues, with a total width not exceeding 10 percent of the width of the #building's# walls facing such open area.

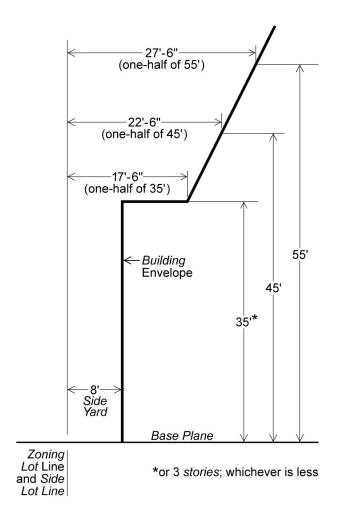

SIDE SETBACK REQUIREMENT


## 24-552 - Required rear setbacks for tall buildings

LAST AMENDED 12/5/2024

#### R1 R2 R3 R4 R5 R6 R7 R8 R9 R10 R11 R12

In the districts indicated without a letter suffix, no portion of a #building# more than 125 feet above yard level shall be nearer to a #rear yard line# than 20 feet. However, this provision shall not apply to any portion of a #building# that qualifies as a tower under the provisions of Section 24-54.

In the case of a #through lot# on which a #rear yard equivalent# is provided as set forth in paragraph (a) of Section 24-382, the requirements of this Section shall apply as if such #rear yard equivalent# were two adjoining #rear yards#. If a #rear yard equivalent# is provided as set forth in paragraphs (b) or (c) of Section 24-382, the requirements of this Section shall not apply.

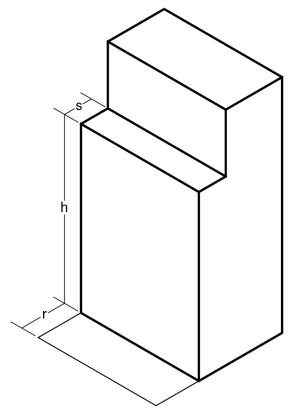

h - Height of wall above rear yard

r - Depth of required rear yard

s - Depth of required rear yard setback

REAR SETBACK FOR TALL BUILDINGS