



## Zoning Resolution

THE CITY OF NEW YORK

Eric Adams, Mayor

CITY PLANNING COMMISSION

Daniel R. Garodnick, Chair

# **43-26 - Minimum Required Rear Yards**

File generated by <https://zr.planning.nyc.gov> on 6/26/2022

---

## 43-26 - Minimum Required Rear Yards

---

LAST AMENDED

4/30/2008

M1 M2 M3

In all districts, as indicated, a #rear yard# with a depth of not less than 20 feet shall be provided at every #rear lot line# on any #zoning lot# except as otherwise provided in Sections 43-27 (Special Provisions for Shallow Interior Lots), 43-28 (Special Provisions for Through Lots) or 43-31 (Other Special Provisions for Rear Yards). #Rear yards# shall also be provided along portions of #side lot lines# as set forth in Section 43-261 (Beyond one hundred feet of a street line).

---

## 43-261 - Beyond one hundred feet of a street line


---

LAST AMENDED

4/30/2008


M1 M2 M3

In all districts, as indicated, for #corner lots#, and for #zoning lots# that are bounded by two or more #streets# that are neither #corner lots# or #through lots#, the portion of a #side lot line# beyond 100 feet of the #street line# that it intersects shall be considered a #rear lot line# and a #rear yard# with a minimum depth of 20 feet shall be provided where such #rear lot line# coincides with a #rear lot line# of an adjoining #zoning lot#.

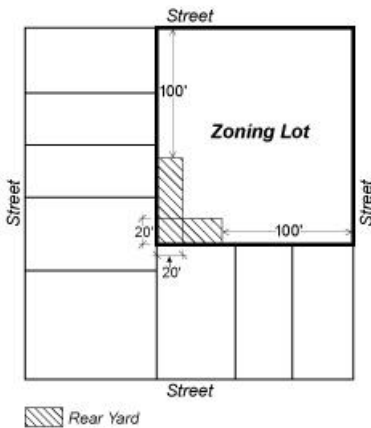

CORNER LOT

(33-261.1, 43-261.1)

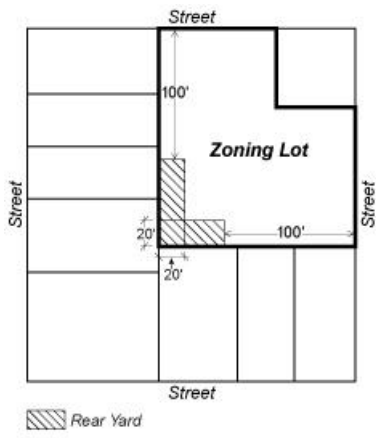

ZONING LOT BOUNDED BY TWO OR MORE STREETS  
(NEITHER A CORNER LOT NOR A THROUGH LOT)  
(33-261.2, 43-261.2)